ÆDRA

CONSTRUCTION & TECHNICAL SERVICES

SPECIALISATION 05 / 22

TIMBER & ACOUSTIC SYSTEMS

Precise timber and acoustic finishes



FROM PLANNING TO DOCUMENTED HANDOVER

PLAN / BUILD / COORDINATE / DELIVER

info@synera.dk

ABOUT ÆDRA AND OUR DELIVERY METHOD

EXPERIENCE BEHIND THE WORK

20+ **years of combined professional construction experience**

Ædra ApS brings together professional know-how developed through subcontracting in Italy since 2006 and construction management, coordination and delivery in Denmark. This experience belongs to the team and leadership; it is not a claim about the company's incorporation date.

WHAT CLIENTS CAN EXPECT

01 CLEAR SCOPE

Materials, trade boundaries, access requirements and responsibilities are agreed before mobilisation.

02 COORDINATED EXECUTION

Resources, sequencing, site supervision and inspections follow the project programme.

03 DOCUMENTED HANDOVER

Inspection records, concealed-work photographs and nonconformity close-out are tracked.

DANSK INDUSTRI (DI)

The companies' DI membership and applicable collective agreements are stated on the basis of company information. The relevant agreement depends on the employer, occupation and assignment. DI membership is not a technical certification.

SOLUTIONS AND APPLICATIONS

FOUR DISTINCT WORK PACKAGES

Every work package is defined through a buildable scope, clear interfaces, quality checks and documented completion.



01 Timber-frame walls and partitions

Survey tolerances, protect timber from moisture, prepare approved connectors and frame the construction in sequence.

02 Timber slat acoustic wall linings

Install substructure and acoustic backing, then fix slats to the documented spacing and finished edge details.

03 Cross-laminated timber interfaces

Support erection around the engineer's connection design and approved temporary stability plan. Coordinate penetrations and service routes.

04 Acoustic floor and vibration separation

Create resilient layers and edge isolation compatible with the selected floor assembly and adjacent partitions.

EXECUTION AND QUALITY CONTROLS

TECHNICAL DELIVERY / CONTROL POINTS

01 Timber-frame walls and partitions

INSTALLATION / DELIVERY METHOD

Survey tolerances, protect timber from moisture, prepare approved connectors and frame the construction in sequence.

QUALITY HOLD POINT

Check timber grade, moisture condition, anchorage, straightness and declared performance.



02 Timber slat acoustic wall linings

INSTALLATION / DELIVERY METHOD

Install substructure and acoustic backing, then fix slats to the documented spacing and finished edge details.

QUALITY HOLD POINT

Inspect backing continuity, slat alignment, fixings, edge finish and product approvals.

EXECUTION AND QUALITY CONTROLS

TECHNICAL DELIVERY / CONTROL POINTS

03 Cross-laminated timber interfaces

INSTALLATION / DELIVERY METHOD

Support erection around the engineer's connection design and approved temporary stability plan. Coordinate penetrations and service routes.

QUALITY HOLD POINT

Verify bearing, connectors, protected joints, fire design and surveyed final position.



04 Acoustic floor and vibration separation

INSTALLATION / DELIVERY METHOD

Create resilient layers and edge isolation compatible with the selected floor assembly and adjacent partitions.


QUALITY HOLD POINT

Check continuity of separation, avoided rigid bridges, thresholds and finish build-up.

MATERIALS AND TRADE INTERFACES

DETAILS THAT MAKE DELIVERY RELIABLE

Confirm the design intent before installation; record concealed interfaces; release the next trade only when the relevant quality hold point is closed.

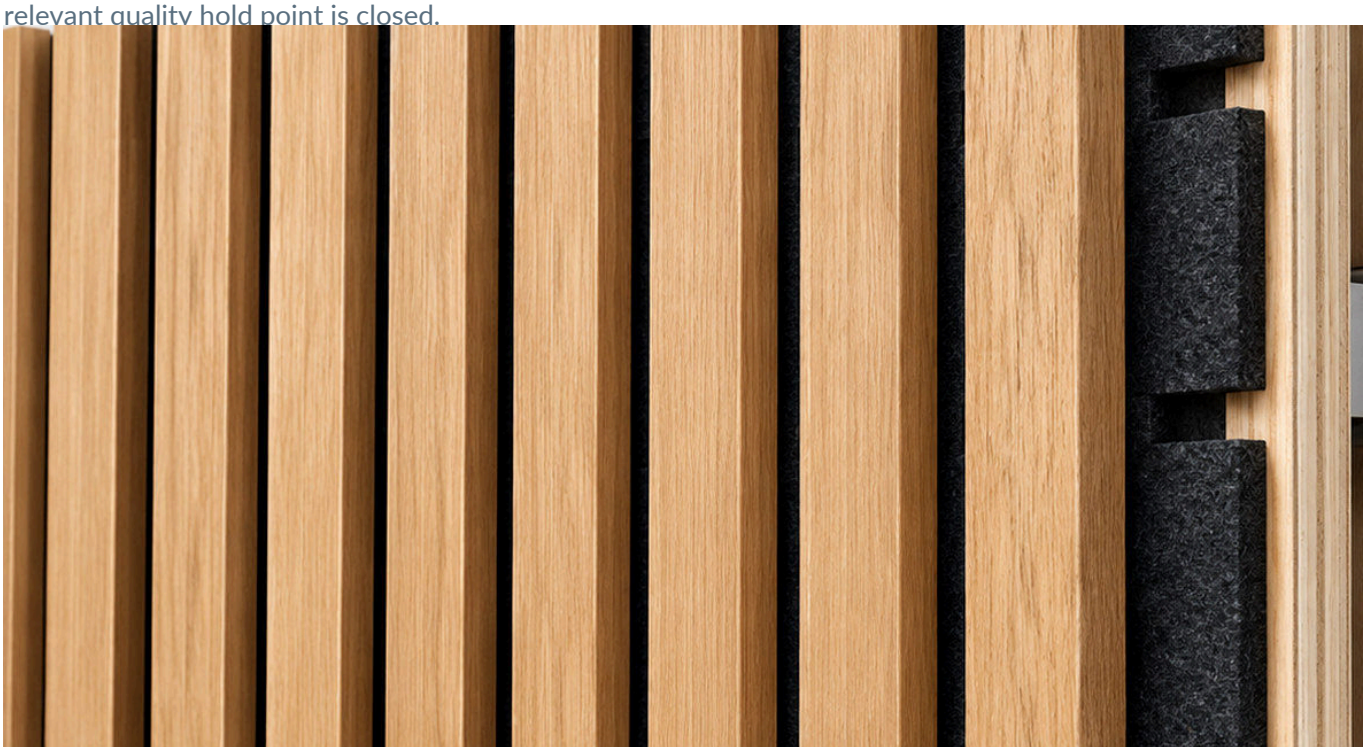

FOUR CRITICAL INTERFACE QUESTIONS

01 Approved substrate and loads

02 Material and system selection

03 Trade and service interfaces

04 Inspection and handover evidence

SYSTEM REQUIREMENT: Dimensions, classifications, installation approvals and permissible activities are established by the project design and the selected manufacturer's documented system.

PROGRAMME / QA-QC / HSE

A DELIVERY PROCESS THAT CAN BE VERIFIED

01 PROJECT DEFINITION

Scope boundaries, design revisions, materials and acceptance criteria.

02 PLANNING & LOGISTICS

Access, sequence, deliveries, interfaces and temporary works.

03 FIRST INSTALLATION

Inspect first-off work or a representative mock-up before repetition.

04 ROUTINE INSPECTIONS

Photographs, dimensions and records of work that will be concealed.

05 DEFECTS & FOLLOW-UP

Assign observations, corrective actions and close-out responsibilities.

06 HANDOVER

Deliver checklists, relevant product records and the agreed dossier.

Safety arrangements and competence boundaries must be agreed for the assignment. Reserved electrical and plumbing installations must be undertaken and signed off by appropriately authorised contractors; Ædra may coordinate builders' works and installation support within its agreed scope.

ÆDRA

SPECIALISATION 05 / ACOUSTICS

FROM FIRST SET-OUT TO THE FINAL INSPECTION.

YOUR PARTNER FOR A COORDINATED PACKAGE

Ædra supports complex building projects through specialised execution, site coordination and documented quality. Share your project, drawings and programme so we can clarify scope and the next step together.

INFO@SYNERA.DK

SELECTED TECHNICAL REFERENCES

01 traeinfo.dk/

02 woodupp.dk/

03 rothoblaas.com/

Images are illustrative and do not represent verified Ædra project references. Fire, acoustic, radiation shielding and structural performance must be checked against the approved project design and tested system details. Membership and collective agreements are stated from company information.

ÆDRA

SYNERA GROUP

Explore all 22 Ædra work areas

09 Civil works & foundation excavation

10 Precast & prefabricated element installation

02 Drywall, X-ray linings & specialist interiors

04 Suspended & airtight ceilings

05 Timber acoustic ceilings & wall cladding

14 Flooring & finishes

15 Painting & surfaces

16 Doors, windows & joinery

17 Masonry, plastering & tiling

18 Renovation & fit-out

06 Ventilation and ductwork

07 Plumbing, pipework & mechanical interfaces

08 Electrical interfaces & builders' works

12 Technical pipe insulation

13 Cladding & ventilated façades

03 Vapour barriers & airtightness

01 Passive fire protection & firestopping

11 Site management, QA/QC & delivery support

19 Cutting & core drilling

20 Roofing & waterproofing

21 ETICS & rendered façades

22 Selective strip-out